


法蘭型微型軸承規格表

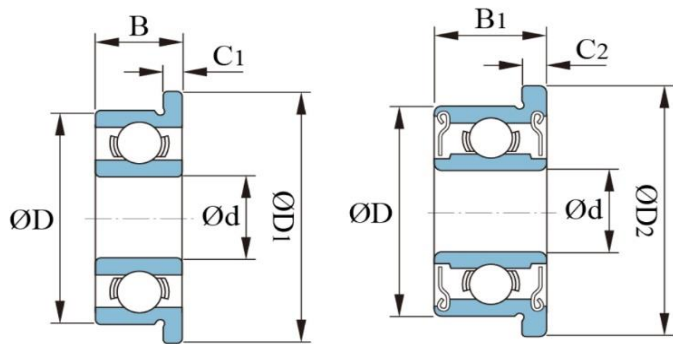

內徑 d	外徑 D	(無蓋厚度)開放型 B	(雙蓋厚度)防塵蓋型 B1	EZO、IJK	NMB
1	3	1	-	F681	LF-301
1	4	1.6	-	F691	RF-401
1.2	4	1.8	2.5	MF41X	RF-412
1.5	4	1.2	2	F681X	LF-415
1.5	5	2	2.6	F691X	RF-515
1.5	5	-	2	F691XZZW2	-
1.5	6	2.5	3	F601X	RF-615
1.5	6	-	2.5	F601XZZW2.5	-
2	5	1.5	2.3	F682	LF-520
2	5	2	2.5	MF52	LF-520(W02)
2	6	2.3	3	F692	RF-620
2	6	-	2.3	F692ZZW2.3	-
2	6	2.5	-	MF62	RF-620(W52)
2	7	2.5	3	MF72	RF-720(Y52)
2	7	-	2.5	MF72ZZW2.5	-
2	7	2.8	3.5	F602	RF--20
2	7	-	2.8	F602ZZW2.8	-
2.5	6	1.8	2.6	F682X	LF-625
2.5	7	2.5	3.5	F692X	RF-725
2.5	7	-	2.5	F692XZZW2.5	-
2.5	8	2.5	2.5	MF82X	RF-825(Y52)
2.5	8	2.8	4	F602X	RF-825
2.5	8	-	2.8	F602XZZW2.8	-
3	6	2	2.5	MF63	LF-630(F673)
3	7	2	2.5	F683	LF-730
3	8	2.5	2.5	MF83	RF-830(Y52)
3	8	-	2.5	MF83ZZW2.5	-
3	8	3	2.5	F693	RF-830
3	8	-	2.5	F693ZZW3	-
3	9	2.5	2.5	MF93	RF-930(Y52)

內徑 d	外徑 D	(無蓋厚度)開放型 B	(雙蓋厚度)防塵蓋型 B1	EZO、IJK	NMB
3	9	-	2.5	MF93ZZW2.5	-
3	9	3	2.5	F603	RF-930
3	9	-	2.5	F603ZZW3	-
3	10	4	2.5	F623	RF-1030
4	7	2	2.5	MF74	LF-740(F674)
4	8	2	3	MF84	LF-740
4	9	2.5	4	F684	LF-740
4	9	-	2.5	F684ZZW2.5	LF-740
4	10	3	4	MF104	LF-740
4	10	-	3	MF104ZZW3	-
4	11	4	4	F694	RF-1140
4	12	4	4	F604	RF-1240
4	13	5	5	F624	RF-1340
4	16	5	5	F634	RF-1640
5	8	2	2.5	MF85	LF-850(F675)
5	9	2.5	3	MF95	LF-950
5	9	-	2.5	MF95ZZW2.5	-
5	10	3	4	MF105	LF-1050
5	10	-	3	MF105ZZW3	-
5	11	-	4	MF115	LF-1150(W04)
5	11	3	5	F685	LF-1150
5	11	-	3	F685ZZW3	-
5	13	4	4	F695	RF-1350
5	13	-	5	F685(W05)	RF-1350(W05)
5	14	5	5	F605	RF-1450
5	16	5	5	F625	RF-1650
5	19	6	6	F635	RF-1950
6	10	2.5	3	MF106	LF-1060(F676)
6	12	3	4	MF126	LF-1260
6	12	-	3	MF126ZZW3	-
6	13	3.5	5	F686	LF-1360
6	13	-	3.5	F686ZZW3.5	-
6	15	5	5	F696	RF-1560
6	17	6	6	F606	RF-1760
6	19	6	6	F626	RF-1960
7	11	2.5	3	MF117	LF-1170(F677)
7	13	3	4	MF137	LF-1370
7	13	-	3	MF137ZZW3	-
7	14	3.5	5	F687	LF-1470

內徑 d	外徑 D	(無蓋厚度)開放型 B	(雙蓋厚度)防塵蓋型 B1	EZO、IJK	NMB
7	14	-	3.5	F687ZZW3.5	-
7	17	5	5	F697	LF-1770
7	19	6	6	F607	RF-1970
7	22	7	7	F627	RF-2270
8	12	2.5	3.5	MF128	LF-1280
8	14	3.5	4	MF148	LF-1480
8	14	-	3.5	MF148ZZW3.5	-
8	16	4	5	F688	LF-1680
8	16	-	6	F688/6	-
8	19	-	4	F688ZZW4	-
8	19	6	6	F698	RF-1980
8	22	7	7	F608	RF-2280
9	14	3	4.5	F679	-
9	17	4	5	F669	LF-1790
9	20	6	6	F699	LF-2090
9	24	7	7	F609	RF-2490
10	19	7	7	F36800	LF-1910
12	21	7	7	F36801	-
15	24	7	7	F36802	-
17	26	7	7	F36803	-
20	32	10	10	F36804	-
25	37	10	10	F36805	-
30	42	10	10	F36806	-